


JLT CRANE SCALE

Feature:

- specially designed circuit with motion compensation ensures the fast stability;
- 1.5 inch LED display, with brightness changing function;
- 360° rotary safety hook;
- aluminum load cell with 200% safe load ability;
- power supply/pause/resolution changing/zero functions;
- battery capability display and auto power off when low voltage;
- aluminum housing with high safety against impacting;
- remote controller enhances its mobility;
- working temperature:0-40°C

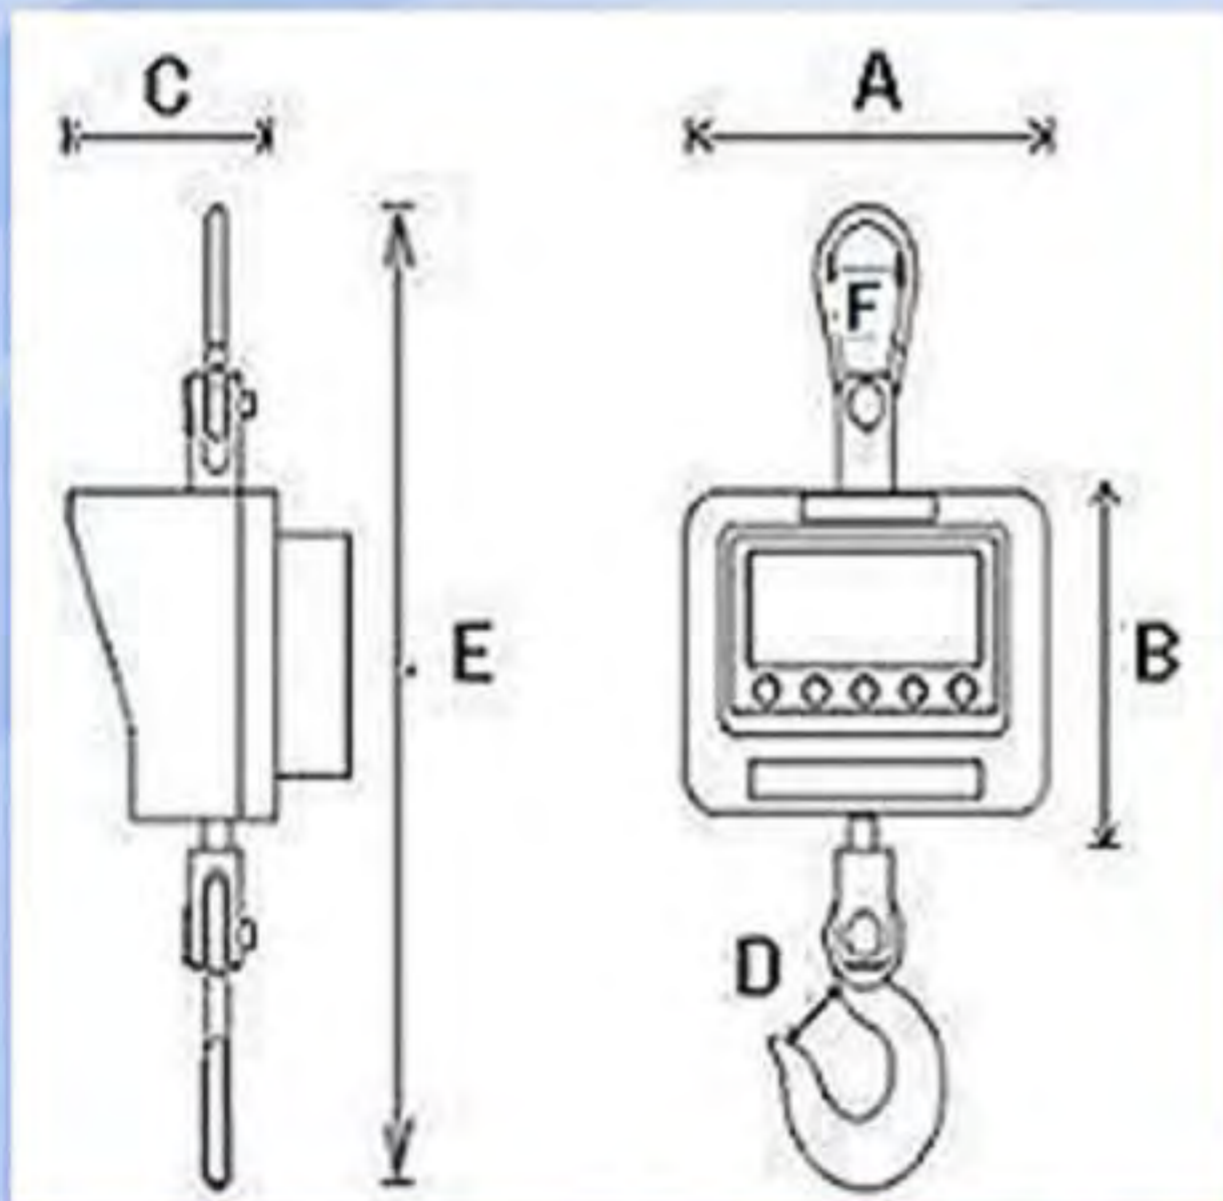

Model No (kg)	Capacity (kg/lb)	Division (kg)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Hook (T)	N.W (kg)
JLT-600	600/1200	0.2/0.1	240	170	170	40	550	87	3	13.4
JLT-1000	1000/2500	0.2/0.5	240	170	170	40	550	87	3	13.4
JLT-2000	2000/5000	0.5/1.0	240	170	170	40	550	87	4.5	13.7
JLT-3000	3000/7000	0.5/1.0	240	170	170	40	550	87	4.5	13.7
JLT-5000	5000/10000	2/1	240	170	180	50	690	90	7	23.3
JLT-7500	7500 /11000	5/2	240	170	180	52	690	90	8	24
JLT-10000	10000/22000	5/2	260	195	200	52	830	92	11	35
JLT-15000	15000/33000	10/5	260	195	200	52	950	92	15	42
JLT-20000	20000/44000	10/5	260	195	200	100	1150	120	25	75.5
JLT-25000	25000/55000	10/5	260	195	200	100	1150	120	25	75.5
JLT-30000	30000/66000	10/5	260	210	210	130	1300	150	35	119
JLT-35000	35000/75000	10/5	260	210	210	130	1300	150	35	119